

uniseal Anti - Skid




Uniseal® Anti-Skid Floor Protection System is a water-based, low-VOC floor coating for concrete, metal, and asphalt that provides a durable, non-slip, easy-to-maintain surface for foot and light vehicle traffic.

APPLICATIONS:

- Concrete, metal, and asphalt floors
- New floors and renovations

BENEFITS:

- Non-slip surface
- Low-VOC and easy to apply
- Durable and abrasion - resistant
- Easy to clean and maintain

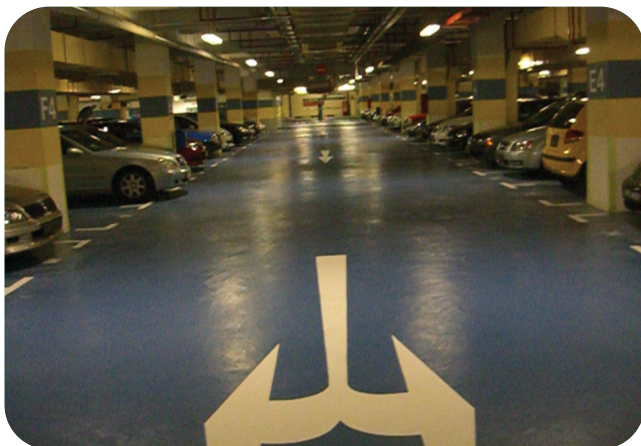

Tech Specs	UOM	Uniseal® Anti-Skid
Material		Modified Acrylic
Colour	Standard	Grey
	Enquiry	Others
Pack Size	l	20
Viscosity @ 25°C	cP	9000
Water Vapour Transmission	g/m ² /hr	3 to 5
UV Exposure	Grey Scale	No blistering (1000hrs)
Chemical/Bacterial Resistance		Algae, Fungi resistant
Application:		5 coats
Nominal Film Thickness	mm	1
Tensile Strength	MPa	12 (w/mesh)
Elongation @ break	%	110 (w/mesh)
Hardness	Shore A	>75
Adhesion Strength	MPa	1.3
Application Temperature	°C	10 to 70
Drying Time:	hr	1/2 to 3/4
Curing Time	hr	4 to 5